PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6: B01J 13/04, A61K 47/48, 49/00, 9/50 (11) International Publication Number:

WO 96/11054

A2

(43) International Publication Date:

18 April 1996 (18.04.96)

(21) International Application Number:

PCT/US95/12988

(22) International Filing Date:

5 October 1995 (05.10.95)

(30) Priority Data:

111186

6 October 1994 (06.10.94)

IL

(71) Applicants (for all designated States except US): BAR-ILAN UNIVERSITY [IL/IL]; 52900 Ramat-Gan (IL). LICHTEN-STEIN, Joseph [US/IL]; 17 HaAdmor MiGur Street, 51525 Bnei-Brak (IL).

(72) Inventors; and

(75) Inventors/Applicants (for US only): MARGEL, Shlomo [IL/IL]; 14 Habaal-Shem-Tov Street, 76210 Rehovot (IL). BAMNOLKER, Hanna [IL/IL]; 122 Catsanelson Street, 53279 Givataim (IL).

(74) Agent: KURUCZ, John; 20th floor, 711 3rd Avenue, New York, NY 10017 (US).

(81) Designated States: AL, AM, AT, AU, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IS, IP, KE, KG, KP, KR, KZ, LK, LR, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TT, UA, UG, US, UZ, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG), ARIPO patent (KE, MW, SD, SZ, UG).


Published

Without international search report and to be republished upon receipt of that report.

(54) Title: PROCESS FOR THE PREPARATION OF MICROSPHERES AND MICROSPHERES MADE THEREBY

(57) Abstract

A process for the preparation of a microsphere comprising a coating composed of one or more silica nanoparticles layers, comprises the steps of: a) providing a microsphere of polymeric material, the said microsphere having adsorbed on its surface one or more surfactants; and b) causing a layer of silica nanoparticles to coat the surface of the said microsphere by means of seeded polymerization of alkyl silicates onto the surface of said microsphere.

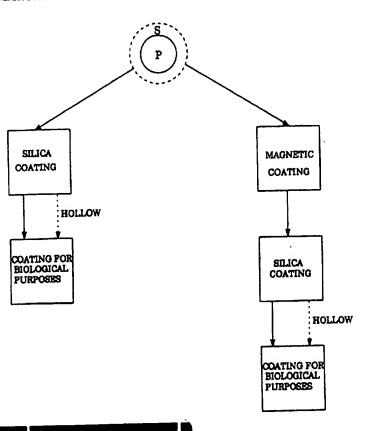

ATTORNEY DOCKET NUMBER.: 1803-337

-SERIAL NUMBER.: 09/756,743

DEFERENCE: A115

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

		United Kingdom		Mauritania
Australia		Georgia	MW	Malawi
Barbados	GN	Guinea	NE	Niger
Belgium	GR	Greece	NL	Netherlands
Burkina Faso	HU	Hungary	NO	Norway
Bulgaria	IB	heland	NZ	New Zealand
Benin	IT	Italy	PL	Poland
Brazil	JP.	Japan	PT	Portugal
Belarus	KE	Kenya	RO	Romania
Canada	KG	Kyrgystan	RU	Russian Federation
Central African Republic	KP	Democratic People's Republic	SD	Sudan
Congo		of Korea	- SE	Sweden
Switzerland	KR	Republic of Korea	SI	Slovenia
Côte d'Ivoire	KZ	Kazakhstan	SK	Slovakia
Cameroon	L	Liechtenstein	SN	Senegal
China	LK	Sri Lanka	TD	Chad
Czechoslovakia	w	Luxembourg	TG	Togo ·
Czech Republic	LV	Latvia	TJ	Tajikistan
Germany	MC	Мопасо	TT	Trinidad and Tobago
Denmark	MD	Republic of Moldova	UA	Ukraine
Spain	MG	Madagascar	US	United States of America
Finland	ML	Mali	UZ	Uzbekistan
France	MN	Mongolia	VN	Viet Nam
	Belgium Burkina Faso Bulgaria Benim Brazil Belarus Canada Central African Republic Congo Switzerland Côte d'Ivoire Cameroon China Czechoslovakia Czech Republic Germany Denmark Spain Finland	Australia GE Barbados GN Belgium GR Burkina Faso HU Bulgaria IB Benin IT Brazil JP Belarus KE Canada KG Central African Republic KP Congo Switzerland KR Côte d'Ivoire KZ Cameroon L1 China LK Czechoslovakia LU Czech Republic LV Germany MC Denmark MD Spain MG Finland ML	Australia GB United Kingdom Australia GE Georgia Barbados GN Guinea Belgium GR Greece Burkina Faso HU Hungary Bulgaria IB heland Benin IT haly Brazil JP Japan Belarus KE Kenya Canada KG Kyrgystan Central African Republic KP Democratic People's Republic of Korea Switzerland KR Republic of Korea Côte d'Ivoire KZ Kazakhstan Cameroon LI Liechtenstein China LK Sri Lanka Czechoslovakia LU Luxembourg Czech Republic GF Monaco Demmark MD Republic of Moldova Spain MG Madagascar Finland ML Mali	Australia GE Georgia MW Barbados GN Guinea NE Belgium GR Greece NL Burkina Faso HU Hungary NO Bulgaria IB heland NZ Benin IT Italy PL Brazil JP Japan PT Belarus KE Kenya RO Canada KG Kyrgystan RU Central African Republic KP Democratic People's Republic SD Congo of Korea SI Côte d'Ivoire KZ Kazakhstan SK Cameroon LJ Liechtenstein SN China LK Sri Lanka TD Czech Republic LV Larvia TJ Germany MC Monaco TT Denmark MD Republic of Moldova UA Spain MG Madagascar US Finland ML Mali

PCT/US95/12988

WO 96/11054

-1-

PROCESS FOR THE PREPARATION OF MICROSPHERES AND MICROSPHERES MADE THEREBY

FIELD OF THE INVENTION

The present invention relates to a process for the preparation of microspheres, which may be optionally hollow, and which are consisting of one or more layers of silica shells and may also involve other coatings of different materials, characterized by variety of desirable properties.

BACKGROUND OF THE INVENTION

The preparation of well-defined microspheres of controlled composition is of great importance, because of the potential use of such particles in a wide variety of fields. The complexity of processes for preparing such particles is even greater when the particle to be formed is to be used in delicate biological applications, because then several parameters, which are not easy to handle, should be taken into account, such as types of chemical interactions between the different layers composing the microspheres, as well as the relevant function of the particle within the planned biological application.

Applying coating techniques for polymeric microspheres involves difficulties which do not exist in coating processes of flat surfaces, obviously due to the different physical characteristics of spherical systems. For instance, although for a flat surface[Brinker, Hurd, Schunk, Frye and Ashley, J. of Non-Crystline Solids, 147, 424 (1992); Brinker, Frye, Hurd and Ashley, Thin Solid Films 201. 97 (1991)], the art has failed to disclose a method for coating spherical particles with silica. This silica coating is of great importance because, as will become apparent from the description to follow, it plays a major role in the construction of the desired final microsphere. The silica itself consists of particles the diameter of which is about 50 nm, and is obtained, according to sol-gel procedures, by agents such as tetraethoxysilane, [(SiOEt)4], which are converted, via hydrolysis and subsequent condensation, to silica. With respect to processes for enveloping spherical systems of submicron size, prior art mainly disclosses methods for coating inorganic microspheres (made of titania, for example) with polyurea or aluminum oxide [Mayville, Partch and Matijevic, J. Colloid Interface Sci. 120, 135 (1987); Kratohvil and Matijevic, Adv. Ceram. Mater. 2, 798 (1987); Grag and Mateijevic, Langmuir 4, 38 (1988); Aiken and Matijevic, J. Colloid Interface Sci. 126, 243 (1988)]. However, processes described by the prior art, through which organic microspheres are coated, are unsatisfactory and limited, from several aspects: the microsphere is of diameter of only 0.1 µm to 0.3 µm, and is composed only of cationic polystyrene. Furthermore, in all these processes the coating is made of inorganic material, namely, yttrium basic carbonate. Thus, Although hollow yttrium microspheres were further obtained by burning off the core of the described cationic polystyrene coated particles, this characteristic, namely, the inorganic nature of the coating, clearly limits the scope of the fields in which these systems can be applied, Because, as can be learned from the present and Matijevic, J. Colloid Interface Sci. 138, 534 (1990); Kawahashi Matijevic, J. Colloid Interface Sci. 143, 103 (1991); Matijevic, Langmuir 10, 8 (1994)].

Another important type of coating is one exhibiting magnetic properties. A method for the preparation of ferrite plating of various chemical compositions is known in the art [Abe et al., J. of Applied Physics 57, pp. 3795-3797, (1985)], yet this method is characterized by several disadvantages and limitations. First of all, an essential condition for the formation of the ferrite film is the presence of hydroxyl groups on the substrate to be coated, because these groups enhance the adhesion of the film to the surface. Furthermore, according to this method, if the microsphere diameter is smaller than $0.5 \, \mu m$, a continued magnetic coating can not be obtained . Finally, Abe et al. failed to disclose means for the protection of the ferrite coating, in order to avoid a partial leakage of the ferrite into the solution.

The present invention provides processes for the production of microspheres characterized by several desired properties:

- a) It provides a process for the preparation of silica coating to spherical particles, wherein surfactants of proper nature, adsorbed on the microspheres, serves as a "connective glue" between the microsphere and the silica nanoparticles;
- b) It provides a process for the preparation of a microsphere coated with a magnetic layer;
 - c) It provides a process for the preparation of hollow silica microspheres;
 - d) It provides a process for the preparation of magnetic microspheres

e) It allows a further modification of the surface of the solid or hollow microspheres, which are coated by magnetic layers and silica layers, to adjust them to several biological applications.

SUMMARY OF THE INVENTION

The invention is directed to the preparation and use of microspheres, the diameter of which is in the range of about 0.2 µm up to a few microns, which are made of polymeric materials and contain surfactants of hydrophilic nature on their surfaces. This microspheres are then subjected to further coating stages. The final coated microspheres can then serve in a variety of biological applications. The microspheres can be rendered hollow by removing therefrom the inner polymeric core.

According to the process of the invention the microspheres are obtained by polymerization of monomeric units, such as styrene, chloromethylstyerene, divinylbenzene and methylmethacrylate, in the presence of surfactants of hydrophilic nature and an initiator. The choice of the surfactant composition and concentration, as well as other parameters of the reaction, such as initiator type, monomer concentration, governs the distribution of the microspheres diameters. Furthermore, the inventors have found that the quality of the coatings to be crated on the microspheres is also affected by two of these factors, namely, by the surfactant composition and by the initiator. As said, proper surfactants for coating purposes are of hydrophilic nature. Furthermore, it has been surprisingly found that the composition of the surfactants may serve as a tool for controlling the coating quality, by choosing

or fractions for the hydrophilis and hydrophobic surfactants

By the term "surfactant" is meant to indicate a high molecular weight compound having one or more hydrophilic region(s) and one or more hydrophobic region(s). Illustrative and nono limitative examples of suitable surfactants are polyethylene oxide, polyacrylic acid, copolymers of polyvinyl pyrrolidone-polyvinyl acetate in different ratios.

According to a preferred embodiment of the invention, the hydrophilic surfactant is chosen from among polyvinylpyrrolidone, polyacrylic acid and polyethyleneoxide. A preferred initiator is benzoylperoxide.

According to the invention, the microspheres which comprise surfactants on their surface, are treated in an organic solution, i.e. alcoholic solution, which includes alkyl silicates as an agent for the silica production, and a catalyst. Preferably, the alcoholic solution is composed of ethanol and water, the alkyl silicate is Si(OEt)₄ and the catalyst is ammonia.

Another purpose of the present invention is to provide a process for the preparation of hollow silica microspheres. According to the invention, these hollow shells are obtained by removing the inner polymeric core of the microspheres by burning or dissolving it. In particular, the burning off is performed by subjecting the microspheres to temperatures in the range of 400°C-900°C. Alternatively, the dissolution is carried out by means of appropriate solvents. Illustrative, but non limitative, solvents comprise

According to the present invention, the polymeric microspheres, containing proper surfactants on their surface, may further be intermediately coated by a magnetic layer. In particular, said magnetic layer may be of Fe_3O_4 . This coating process is carried out in an aqueous solution, in a temperature range of 55°C-90°C, and in a pH range of 8 to 11, preferably between 10-11, since it was found that the magnetic intensity of the coated microspheres is enhanced if more basic conditions are applied. The ferrite formation involves oxidizing part of the Fe+2 to Fe+3, and then interaction between these two spieces to obtain the ferrite.. The source for the divalent cation may be, for example, salts such as FeCl₂·4H₂O, and the oxidation reagent may be chosen, for instance, from among NaNO₂, H₂O₂ or air. The inventors have found that the magnetic properties of the coated microsphere are determined by the nature of the surfactant adsorbed initially on the particle surface. If hydrophobic surfactants are used, in combination with a hydrophilic one, a significant retardness is observed in the magnetic intensity of these coated microspheres, compared with those obtained with hydrophilic surfactant alone.

A further object of the present invention is to provide a process for the preparation of solid or hollow microspheres optionally comprising magnetic coatings, and further enveloped by silica layers. These coated microspheres are then subjected to further modification which have extremely important uses. The silica functionalizes in two different levels: it provides a defensive shell to the ferrite coating, and it serves as a source of optional covalent bonds, through which desired ligand may be attached to the system, in order to form the final, desired particle. According to said process, silica coating of said microspheres (which are optionally magnetic) is performed as hereinbefore described. Then,

anamaion of acceted microsphares which as said may be solid or

-7-

hollow, appropriate ligands are added, comprising a functional group at their ω -position. In particular, these ligands can form covalent bonds with the silica coating. The ligands may be chosen from among alkylsilane and/or alkylhydroxyl compounds, in particular SiCl3(CH2)nX, $Si(OR)_3(CH_2)_nX$, OH(CH2)nX, wherein R is an alkyl substituent, n is between 2 to 20 and X is -NH2, -CH3, -CO2R, -CN, etc. Of particular importance is the amine group, or other functional groups which can be converted to an amine group, because covalent binding of polyaldehyde ligands onto these groups may be further applied. The polyaldehyde derivatized microsphere surface obtained may be now coupled to biomaterials such as proteins. According to a preferred embodiment of the invention, in order to increase the interactions of said polyaldehyde ligands with the desired biomaterials, the residual ω-amine groups can be blocked by a proper reagent, for instance, acetic acid Nhydroxysuccin-imide ester. Furthermore, the inventors have found that acidic pH conditions improve the content of said aldehyde in the derivatized microsphere.

These solid and/or hollow aldehyde derivatized microspheres may now functionalize in several biological applications, when conjugated to biomaterials.

Fig. 6 summarizes various preferred embodiments of the present invention,

All the above and other characteristics and advantages of the invention will be better understood through the following illustrative and non-limitative description of preferred embodiments thereof.

BRIEF DESCRIPTION OF THE DRAWINGS

In the drawings:

Fig. 1 is a SEM photograph of polystyrene microspheres;

Fig. 2A is a TEM picture of a polystyrene microsphere of ca. 1.8 μm coated with three layers of silica nanoparticles of ca. 30 nm average diameter;

Figs. 2B and 2C are TEM and SEM pictures, respectively of hollow microspheres obtained by burning off the organic content of these coated microspheres at 800°C for 12 h;

Figs. 3 (A and B) are cross-section pictures obtained by TEM of hollow silica microspheres prepared from polystyrene microspheres of ca. 1.8 μm

with a single layer of silica nanoparticles of ca. 30 nm diameter (Fig. 4A), and three layers of similar silica nanoparticles (Fig. 4B);

Fig. 5A illustrates SEM photomicrograph of polystyrene microsphere of ca. 2.3 μm diameter.

Fig. 5B Illustrates the magnetic coating on polystyrene microspheres of ca. 2.3 μm diameter.

Fig. 5C illustrates the first silica nanoparticles coating on magnetic polystyrene microspheres of ca. $2.3\,\mu m$, prepared according to example 13; and

Fig. 6 summarizes various preferred embodiments of the present invention, wherein P is the polymeric microsphere and S is the surfactant adsorbed on its surface.

<u>DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS</u>

EXPERIMENTAL

Synthesis of polystyrene microspheres.

Polystyrene microspheres were prepared according to the literature/ C.K. Ober, K.P. Lok and M.L. Hair, J. of Polymer Sci., Polymer Letters Edition 23, 103 (1985)/. Briefly, These microspheres were prepared in a three-neck round-bottom flask equipped with a condenser. The flask was immersed in a constant

solution containing PVP (M.W. 360,000, 3.75 g) dissolved in ethanol (156 ml) and methyl cellosove (2-methoxyethanol, 62.5 ml) at room temperature was placed into the reaction flask and mechanically stirred (ca. 200 rpm). The temperature was then preset to 73°C. Nitrogen was bubbled through the solution for ca. 15 min. to exclude air, then a blanket of nitrogen was maintained over the solution during the polymerization period. A deairated solution containing benzoyl peroxide (1.5 g) and styrene (37.5 ml), previously purified through alumina column, was then added to the reaction flask. The polymerization reaction continued for 24 h. and then stopped by cooling. The obtained microspheres were washed by extensive centrifugation cycles with ethanol and then with water. The particles were then dried by lyophilization. Scanning Electron Microscopy (SEM) photomicrographs demonstrated the formation of monodispersed particles of 2.3 µm average diameter with a standard deviation of ca. 5% (Fig. 1).

The diameter of the formed microspheres were controlled by changing conditions, such as surfactant type, surfactant concentration, initiator type, monomer concentration, reaction time, etc. Thereby, monodispersed and polydispersed microsphere systems in sizes ranging from approximately 0.2 µm up to several microns were formed. For example, similar polymerization procedure as described above, substituting the initiator benzoyl peroxide with azobisisobutironitrile, resulted in the formation of polydispersed microspheres with 4.2 µm average diameter instead of monodispersed microspheres of 2.3 µm average diameter obtained when benzoyl peroxide was used.

Crosslinked polystyrene microspheres of ca. 0.3 µm diameter were

-11-

substituting styrene with divinylbenzene or substituting styrene with a monomer mixture composed of 45% styrene and 55% divinylbenzene. Microns sized polydispersed crosslinked polystyrene microspheres were prepared by a suspension polymerization process, through a procedure similar to that described in the Q.C. Wang, F. Svec and M.J. Frechet, Polymer Bulletin 28, 569 (1992).

Synthesis of polychloromethylstyrene microspheres

Monodispersed polychloromethylstyrene microspheres were prepared by a procedure similar to that described for polystyrene microspheres, substituting the solvent mixture (ethanol + methyl cellosove) with ethanol. In a typical reaction, 5.0 ml chloromethylstyrene were polymerized in 100 ml ethanol containing 1.15 PVP (M.W. 360,000) and solution g azobisisobutironitrile. Thereby, monodispersed polychloromethylstyrene microspheres of ca. 1.2 µm diameter (standard deviation of ca. 5%) were formed. Microspheres with a variety of diameters were formed by changing conditions, such as monomer concentration, surfactant concentration, etc.

Synthesis of polymethylmethacrylate microspheres.

Monodispersed polymethylmethacrylate (PMMA) microspheres were prepared by a procedure similar to that described for polystyrene microspheres, substituting the solvent mixture (ethanol + methyl cellosove) with ethanol. In a typical reaction, 23 ml methylmathacrylate were polymerized in 212 ml ethanol solution containing 3.75 g PVP (M.W. 360,000) and 1.5 g bezovlperovide. Thereby, PMMA microspheres of ca. 2.0 um diameter. Were

formed. Microspheres with a variety of diameters were formed by changing conditions, such as monomer concentration, surfactant concentration, etc.

Synthesis of silica nanoparticles.

Silica nanoparticles were prepared by the sol-gel technique by polymerization of Si(OEt)₄ according to the Stober Method/ W. Stober, A. Fink and E. Bohn, J. Colloid Interface Sci. 26, 62 (1968)/. Briefly, particles of 30 nm average diameter were prepared by adding into a flask according to the listed order the following reagents: ethanol (93.6 ml), distilled water (1.9 ml), ammonium hydroxide (1.3 ml) and Si(OEt)₄ (3.2 ml). The resulting solution was then shaken at room temperature for ca. 12 h. The formed nanoparticles were washed by evaporation of the unreacted monomer, ethanol and ammonia. Water was added during the evaporation to retain the total volume of the silica suspension. Thereafter, water was evaporated up to ca. 10 ml total volume. This suspension was then dried in a vacuum oven. Particle analyzer measurements demonstrated the formation of silica nanoparticles of ca. 30 nm average diameter. Silica nanoparticles of different sizes were prepared by changing conditions, such as monomer concentration, water concentration, etc.

Synthesis of polyacrolein nanoparticles.

Polyacrolein nanoparticles were synthesized according to the literature/S. Margel, Reactive Polymers 1, 241 (1983)/. Briefly, polyacrolein nanoparticles of ca. 70 nm average diameter were prepared by cobalt irradiation (approx. 1 Mrad) of a deairated solution containing 90 ml distilled water, 1 g sodium dodecyl sulfate and 10 ml acrolein. The formed microspheres were then washed

Example 1

Preparation of thin coatings from silica nanoparticles on polystyrene microspheres.

Dried polystyrene microspheres of 1.8 µm average diameter containing polyvinlpyrrolidone adsorbed on its surfaces, prepared according to the description in the experimental part, were added into a flask containing ethanol (93.6 ml) and distilled water (1.9 ml). The microspheres were then suspended in the solvent by sonication. Ammonium hydroxide (1.3 ml) and Si(OEt)₄ (3.2 ml) were then added to the previous polystyrene suspension. The resulting suspension was then shaken at room temperature for ca. 12 h. The formed thin coated silica nanoparticles-polystyrene microspheres were washed with water from non-grafted silica nanoparticles (ca. 30 nm average diameter) by repeated centrifugation cycles at ca. 3000 rpm for ca. 40 min. The silica-coated polystyrene microspheres were then dried in a vacuum oven. A second coating cycle was performed similarly, substituting the polystyrene microspheres with the silica-coated polystyrene microspheres. A similar procedure was performed for a third, fourth, etc. coating cycles.

Fig. 2A illustrates a TEM phtomicrograph of polystyrene microsphere coated with three layers of silica monoparticles.

Cross section photomicrographs of the thin coated polystyrene microspheres taken with transmission electron microscopy (TEM) [Fig. 3] demonstrated that the thickness of each layer of the continuous silica nanoparticle coatings is ca.

25-30 nm Thermogravimetric studies and/or elemental analysis

measurements demonstrated that the percent silica in the first coating is ca. 7.8%, in the second ca. 13.5%, in the third ca. 18.5% and in the fourth ca. 20.5%.

Example 2

Example 1 was repeated, substituting the 3.2 ml Si(OEt)₄ with 1.8 ml Si(OEt)₄. Similar results were obtained, except that the silica nanoparticle coating on the polystyrene microspheres decreased from ca. 30 nm average diameter to ca. 20 nm average diameter.

Example 3

Preparation of continuous thin coatings of silica nanoparticles on polystyrene microspheres.

Dried polystyrene microspheres of ca. 1.8 µm average diameter containing polyvinlpyrrolidone adsorbed on its surfaces, prepared according to the description in the experimental part, were added into a flask containing ethanol (93.6 ml) and distilled water (1.9 ml). The microspheres were then suspended in the solvent by sonication. Ammonium hydroxide (1.3 ml) and Si(OEt)4 (3.2 ml) were then added to the previous polystyrene suspension. The resulting suspension was then shaken at room temperature for ca. 12 h. A second layer of silica coating was then prepared by adding to the suspension 0.6 ml distilled water and 3.2 ml Si(OEt)4. The reaction was then continued for additional ca. 5h. The formed silica coated polystyrene microspheres were then washed according to the description in Example 1. The percent silica

·15·

obtained in Example 1. A third continuous silica coating on polystyrene microspheres was difficult to prepare because of the difficulties existed in separation of grafted silica nanoparticles from ungrafted silica nanoparticles.

Example 4

Preparation of thin coatings from silica nanoparticles on polystyrene microspheres of different diameters.

Examples 1-3 were repeated substituting the polystyrene microspheres of ca. 1.8 μm average diameter adsorbed with PVP on its surfaces with similar type microspheres, crosslinked and not crosslinked, with variety of diameters, i.e. ca. 0.3, 2.3, 5.2 and 8.0 μm average diameter. Cross section photomicrographs demonstrated similar silica coatings as that obtained in Examples 1-3.

Example 5

Examples 1-4 were repeated substituting polystyrene microspheres containing PVP adsorbed on its surfaces with polystyrene microspheres containing other hydrophilic surfactants adsorbed on its surfaces, i.e. polyacrylic acid and polystyleneovide. Cross section photomicrographs, demonstrated similar

Example 6

Effect of hydrophobic surfactants adsorbed on the polystyrene microspheres on the thin coatings from silica nanoparticles.

Examples 1, 3 and 4 were repeated substituting polystyrene microspheres containing PVP adsorbed on its surfaces with polystyrene microspheres containing surfactants with decreased order of hydrophilic/hydrophobic ratio on its surfaces, i.e. PVP, PVP-PVAc (60:40) and PVAc. Elemental analysis measurements showed that the percent silica significantly decreased when the hydrophilic/hydrophobic ratio of the adsorbed surfactants decreased. For example, the percent silica measured for the first silica coating on polystyrene microspheres prepared with benzoylperoxide was ca. 7.8%, 3.7% and 0.5% for microspheres adsorbed on its surfaces with PVP, PVP-PVAc (60:40) and PVAc, respectively.

Example 7

Example 6 was repeated with polystyrene microspheres prepared with the initiator azobisisobutironitrile instead of benzoylperoxide. Thereby, The hydrophobic character of the formed microspheres increased relative to the microspheres prepared with benzoylperoxide. Thermogravimetric measurements also clearly demonstrated that the percent silica coated on the polystyrene significantly decreased when the hydrophilic/hydrophobic ratio of the adsorbed surfactants decreased. For example, the percent silica measured for the first silica coating on polystyrene microspheres prepared with

-17-

on its surfaces with PVP, PVP-PVAc (60:40) and PVAc, respectively. Similar behavior was also observed for the second silica coating on polystyrene microspheres prepared with azobisisobutironitrile, i.e. the percent silica after the second coating was ca. 8.8%, 2.0% and 1.0% for microspheres adsorbed on its surfaces with PVP, PVP-PVAc (60:40) and PVAc, respectively.

Example 8

Preparation of thin coatings from silica nanoparticles on polychloromethylstyrene microspheres and/or polymethylmethacrylate microspheres.

Examples 1-7 were repeated, substituting the polystyrene microspheres with polychloromethylstyrene microspheres and/or polymethylmethacrylate microspheres prepared according to the description in the experimental part. Cross section photomicrographs indicated similar results.

Example 9

Preparation of hollow silica microspheres.

Hollow silica microspheres were prepared by burning off (i.e. ca. 400°C or above) the organic core of polystyrene microspheres coated with silica nanoparticles, prepared according to Examples 1.5

Fig. 2A is a TEM picture of a polystyrene microsphere of ca. 1.8 µm coated with three layers of silica nanoparticles of ca. 30 nm average diameter. Figures 2B and 2C are TEM and SEM pictures, respectively of hollow microspheres obtained by burning off the organic content of these coated microspheres at 800 °C for 12 h. Infrared measurements indicated the total removal of the organic core from the silica shell.

Fig. 3 (A and B) are cross-section pictures obtained by TEM of hollow silica microspheres prepared from polystyrene microspheres of ca. 1.8 µm average diameter coated with three layers of silica nanoparticles of ca.. 30 nm average diameter.

Fig. 4 shows SEM pictures of hollow silica microspheres obtained by burning off the organic core of polystyrene microspheres of ca. 2.3 µm coated with a single layer of silica nanoparticles of ca. 30 nm diameter (Fig. 4A) and three layers of similar silica nanoparticles (Fig. 4B). The hollow silica microspheres composed of three layers of silica nanoparticles are stable while the hollow silica microspheres composed of a single silica nanoparticles layer are mostly broken. These observation may due to the instability of the coating composed of a single silica layer to stand the vacuum applied for the SEM use.

Example 10

and her discoloring with appropriate

WO 96/11054 PCT/US95/12988

-19-

contained, except silica, also traces of organic polymers which could not be removed by this process.

Example 11

Efforts to prepare hollow silica microspheres by using the procedures described in Examples 9 and 10 with polystyrene microspheres containing PVAc adsorbed on its surfaces and coated with a single layer and/or two layers of silica nanoparticles prepared according to examples 6 and 7 failed, due to the insignificant silica coating on these microspheres.

Example 12

Examples 9-11 were repeated substituting polystyrene microspheres with polychloromethylstyrene microspheres or/and polymethylmethacrylate microspheres coated with silica nanoparticles prepared according to Example 8. Similar results were obtained.

Example 13

<u>Preparation of magnetic thin coatings from Fe₃O₄ on polystyrene</u> microspheres.

The coating was performed in a six-neck round-bottom flask. One neck in the center was used for mechanical stirring, two other necks were used for purging nitrogen and for the exit of this gas, the other three necks w re used for gradual introducing into the flask, during the coating process, deairated aqueous solutions from iron chloride, sodium nitrite and sodium hydroxide, respectively. The flask was improved in a constant temperature viliance vil

bath at a preset temperature. In a typical reaction, An aqueous suspension (200 ml) containing 10 g polystyrene microspheres of ca. 2.3 µm average diameter with PVP adsorbed on its surfaces (prepared according to the description in the experimental part) was sonicated to dispersed the particles, placed then into the reaction flask and mechanically stirred (ca. 200 rpm). The temperature was then preset to 60°C. Nitrogen was bubbled through the suspension during the coating process to exclude air. 1 ml of the iron chloride tetrahydrate aqueous solution (12 mmol in 100 ml H₂O) and 1 ml of sodium nitrite aqueous solution (0.2 mmol in 100 ml H₂O) were then successively introduced into the reaction flask. Thereafter, sodium hydroxide aqueous solution (5 mmol in 100 ml H₂O) was added until pH of ca. 10 was reached. This procedure was repeated 40 times. During this coating process the microspheres became brown-black colored. The magnetic suspension was then cooled to room temperature. The formed magnetic polystyrene microspheres were then washed extensively in water with a magnet and dried then with a lyophilizer.

Fig . 5A illustrates SEM photomicrograph of polystyrene microspheres of ca. 2.3 μm .

Fig. 5B illustrates that the iron oxide coating on these polystyrene

-21-

Example 14

Example 13 was repeated under a variety of conditions: (a) Temperature range between 55°C to 90°C, similar results were obtained; (b) pH range between 8 to 11, the magnetic intensity of the coated microspheres prepared at pH range between 10 to 11 was higher than that prepared at the lower pH range; (c) Mole ratio [NaNO2]/[FeCl2•4H2O] up to 10 times higher than that described in the previous example, similar results were obtained; (d) Addition to the microspheres suspension up to five times more of the different reagents (NaNO2, FeCl2·4H2O, and NaOH) causes to the corresponding growth of the iron oxide coating on the microspheres.

Example 15

Experiments 13 and 14 were repeated, substituting the oxidizing agent NaNO₂ with other oxidizing agents, i.e. H₂O₂ and air. Similar results were obtained.

Example 16

Examples 13-15 were repeated, substituting the polystyrene microspheres of ca. 2.3 µm containing PVP adsorbed on its surfaces with microspheres of different sizes, i.e. ca. 0.3, 1.8 and 6.0 µm containing different hydrophilic surfactants adsorbed on its surfaces, i.e. PVP, polyacrylic acid and polyethyleneovide. Similar results were obtained (percent increase) in the containing the polystyrene microspheres of case and polyethyleneovide. Similar results were obtained (percent increase) in the containing the polystyrene microspheres of case and case and containing the polystyrene microspheres of case and containing the polystyrene microspheres of case and c

-22-

Example 17

Examples 13-15 were repeated, substituting the polystyrene microspheres of ca. 2.3 µm containing PVP adsorbed on its surfaces with microspheres containing hydrophobic surfactants, such as PVAc. The percent iron oxide of these coated microspheres was significantly lower (i.e. ca. 3%) than that adsorbed with hydrophilic surfactants. These observations also lead to a significant lower magnetic intensity of these coated microspheres relative to the microspheres that contained hydrophilic surfactants adsorbed on its surfaces.

Example 18

Preparation of magnetic thin coatings from Fe₃O₄ on polychloromethylstyrene microspheres and/or polymethylmethacrylate microspheres..

Examples 13-17 were repeated, substituting polystyrene microspheres with polychloromethylstyrene microspheres and/or polymethylmethacrylate

-23-

Example 19

Preparation of thin coatings from silica on magnetic polystyrene microspheres.

Examples 1-7 were repeated substituting the polystyrene microspheres with polystyrene microspheres thin coated with Fe₃O₄, prepared according to the description in Examples 13-17. Similar results were obtained. Fig. 5C, for example, illustrates the first silica nanoparticles coating on magnetic polystyrene microspheres of ca. 2.3 μm, prepared according to example 13. The process described above was also repeated with coatings prepared from silica nanoparticles of sizes ranging from ca. 20 nm up to ca. 0.1 μm. The separation of grafted silica nanoparticles from non-grafted was performed with a magnetic field. SEM and TEM photomicrographs demonstrated the complete coating of the microsphere surfaces with silica nanoparticles.

Example 20

Preparation of thin coatings from silica on magnetic polychloromethylstyrene microspheres and/or polymethylmethacrylate microspheres.

Example 8 was repeated substituting the polychloromethylstyrene microspheres and/or polymethylmethacrylate microspheres with similar microspheres thin coated with Fe₃O₄ prepared according to the description in experiment 18. Similar results were obtained.

-24-

Example 21

Preparation of magnetic hollow silica microspheres.

Examples 9-12 were repeated, substituting the polystyrene microspheres and/or polychloromethylstyrene microspheres and/or poltmethylmethacrylate microspheres coated with silica nanoparticles with similar microspheres coated with Fe₃O₄ and with silica, prepared according to the description in Examples 19 and 20. Similar results were obtained.

Example 22

Hydrophilic/hydrophobic character of the hollow microspheres

Silica hollow microspheres and/or magnetic silica hollow microspheres prepared by burning off the organic core from the inorganic shell at temperatures above ca. 900 °C were floated on water due to its hydrophobic character. On the other hand, similar hollow microspheres prepared below ca. 600 °C sank in water. However, if these dried hollow microspheres are reburned at temperatures above ca. 900 °C they also become hydrophobic and float on water.

Example 23

Surface modification of the silica coated microspheres and/or silica

and/or ω-functionalized alkylhydroxyl compounds has been performed by the following general procedure: Dried microspheres were added to the appropriate solvent. The resulting mixture was then sonicated in order to dispersed the particles in the solvent. The derivatization of the suspended microspheres was then accomplished at the desired temperature for the desired period of time by adding the appropriate ω-functionalized alkylsilane compound and/or ωfunctionalized alkylhydroxyl compound to the microspheres suspension. The derivatized microspheres were then washed from undesired compounds by repeated centrifugation cycles under appropriate conditions (or with a magnetic field if magnetic microspheres were used). The washed derivatized microspheres were then dried with a lyophilizer and/or a vacuum oven. If necessary, in order to prevent nonspecific interactions with the silica (due to its negative charge) blocking of residual silica with appropriate reagents, such as bovine serum albumin (BSA), was performed by suspending the derivatized microspheres in phosphate buffered saline (PBS) solution containing 1 % BSA for ca. 2 h at room temperature. The derivatized microspheres were then washed by centrifugation (or with a magnetic field if magnetic microspheres

a used) with distilled proton and then dried by brophilization

neck flask containing 800 ml buffer acetate, 0.1 M at pH 5.5. The mixture was sonicated for dispersing the particles. 8 ml of the amphiphile Si(OEt)₃(CH₂)₃NH₂ were then added to the suspended microspheres. The suspension was then mechanically stirred at 60°C for 18 h. Thereafter, the derivatized microspheres were washed by two centrifugation cycles in buffer acetate and another two centrifugation cycles in distilled water. The ω-amino derivatized microsphere surfaces were then dried by lyophilization. If necessary, albumin blocking of the derivatized microspheres was then performed as described previously.

2. Derivatization of silica microspheres in organic solution with alkylsilane compounds, i.e. Si(OEt)3(CH₂)2CN and/or SiCl₃(CH₂)₁₇CH₃.

In a typical experiment, 1 g of dried crosslinked polystyrene microspheres (ca. 0.3 µm diameter) coated twice with silica nanoparticles were introduced into a three neck flask containing 100 ml bicyclohexyl (or toluene). The mixture was sonicated for dispersing the particles. 1 ml of the amphiphile Si(OEt)₃(CH₂)₂CN or SiCl₃(CH₂)₁₇CH₃ was then added to the suspended microspheres. The suspension was then mechanically stirred at room temperature (or at 110°C when toluene used) for ca. 5 h. Thereafter, the derivatized microspheres were washed by two centrifugation cycles with bicyclohexyl (or toluene) and another two centrifugation cycles with acetone. The derivatized microsphere surfaces were then dried by lyophilization. The reduction of the ω -nitrile microsphere surfaces to ω -amine derivatized surfaces was accomplished by suspending the derivatized microspheres at 50°C for ca.

amino derivatized microsphere surfaces were then dried by lyophilization. If necessary, albumin blocking of the derivatized microspheres was then performed as described previously.

3. Derivatization of silica microspheres in organic solution with alkylhydroxyl compounds, i.e. OH(CH₂)₇CH₃.

In a typical experiment, 1 g of dried crosslinked polystyrene microspheres (ca. 0.3 µm diameter) coated twice with silica nanoparticles were introduced into a three neck flask containing 100 ml octanol. The mixture was sonicated for dispersing the particles. The suspension was then mechanically stirred at 15° C for ca. 5 h. Thereafter, the derivatized microspheres were washed by two centrifugation cycles with octanol and another two centrifugation cycles with acetone. The derivatized microsphere surfaces were then dried by lyophilization. If necessary, albumin blocking of the derivatized microspheres was then performed as described previously.

Example 24 Covalent binding of polyaldehyde ligands onto the ω-amine derivatized microsphere surfaces.

In a typical experiment, the ω-amine derivatized microsphere surfaces prepared as described in example 23 were shaken at room temperature for approximately 5 h in an aqueous solution containing ca. 1% of the different polyaldehyde ligands, i.e. glutaraldehyde or polyacrolein nanoparticles of ca. 70 nm diameter prepared as described in the experimental part. The

polyaldehyde derivatized microsphere surfaces were then washed by extensive centrifugation with distilled water. If necessary, in order to decrease nonspecific interactions with biomaterials, i.e. proteins, residual ω-amine groups of the polyaldehyde derivatized surfaces were blocked with acetic acid N-hydroxysuccin-imide ester by repeated the procedure described for the covalent binding of the polyaldehyde ligands to the microsphere surfaces, substituting the polyaldehyde ligands with 0.2% acetic acid N-hydroxysuccinimide ester in PBS solution. The blocked polyaldehyde derivatized microspheres were then washed as previously described. The washed derivatized microspheres were then dried by lyophilization.

Example 25 Covalent binding of acrolein onto the ω-amine derivatized

The ω -amine derivatized microsphere surfaces—prepared as described in example 23 were shaken at room temperature—for approximately 5 h in an aqueous solution, at pH range—between 2-9, containing ca. 1% acrolein. The formed polyaldehyde derivatized microsphere surfaces were then washed by extensive centrifugation with distilled water. The polyaldehyde derivatized microspheres were then treated as described in example 24. Our studies demonstrated that the binding of acrolein at acidic pH, i.e. between pH-2 to pH-4 resulted in approximately 3 to 10 times more aldehyde—content in the

microsphere surfaces.

-29-

Example 26

Coupling of amino ligands (i.e. proteins) to the polyaldehyde derivatized microsphere surfaces.

In general, the solid and/or hollow polyaldehyde derivatized microspheres were shaken at room temperature (or other desired temperature) for few hours with the desired protein in PBS (or other physiological solution). Unbound protein was then removed by centrifugation cycles (or by a magnetic separation) in PBS. Residual aldehyde groups were then blocked with amino ligands, such as BSA, hydroxylamine or ethanol amine in pH-7. The protein conjugated microspheres were kept in PBS (or water) at 4°C or kept dried after lyophilization.

In a typical experiment, 10 mg microspheres composed of polyaldehyde derivatized silica coated polystyrene microspheres of ca. 1.8 µm diameter were shaken at room temperature for 4 h with 1 mg trypsin in 5 ml PBS. Unbound trypsin was then separated by 3 centrifugation cycles in PBS. Residual aldehyde groups on the microspheres were then blocked by shaking the conjugated microspheres at room temperature for 4 h with BSA (1%) in PBS. Unbound BSA was then removed by 2 centrifugation cycles in PBS and then 2 centrifugation cycles in distilled water. The trypsin conjugated microspheres were then dried by lyophilization.

By using similar procedure, the following proteins were covalently bound to the

Example 27

Biological applications of the protein-conjugated polyaldehyde microspheres.

1. Diagnostics: Determination of α_1 -antitrypsin in human serum

The activity of the trypsin conjugated microspheres prepared as described in example 26 was checked with the substrate ∝-N-benzoyl-DL-arginine p-nitroanilide (BAPNA). The conjugated trypsin in reaction with BAPNA in Tris buffer (pH-8) liberated p-nitroaniline of which its absorbance value at 400 nm was measured.

The determination of \$\alpha_1\$-antitrypsin in human serum was based on the inhibitory effect of antitrypsin of serum on the hydrolysis of BAPNA by the conjugated trypsin in Tris buffer. The reaction is stopped by adding acetic acid, and the absorbance is then read at 400 nm. At this wavelength the liberated p-nitroaniline has a molar absorptivity of 10,500. Briefly, before the assay, each examined serum was diluted 1000 fold with Tris buffer. 2 ml of the diluted serum were then incubated at 37°C for 30 min with 1 ml suspension containing 10 mg trypsin-conjugated microspheres in Tris buffer. 5 ml of BAPNA solution (prepared by dissolving 100 mg BAPNA in 2.3 ml dimethylsulfoxide, and then diluted 1 ml of this stock solution with 100 ml Tris buffer at pH 8.0) at 37°C was then added for 30 min to the serum-trypsin-conjugated microspheres suspension. The reaction was stopped by adding 1 ml glacial acetic acid. The degree of interaction between the conjugated trypsin and BAPNA was then determined by the absorbance value at 400 nm. Control experiments were

 α_1 -antitrypsin was determined by comparison to a standard curve obtained from a known amount of α_1 -antitrypsin. The results obtained by this method were in a good agreement with the results obtained by the radial immunodiffusion method/ A.A. Dietz, H.M. Rubinstein and L. Hodges, Clin. Chem. 20 (3), 396 (1974); J. Travis and D. Johnson, Methods Enzymol. 80, 754 (1981)/, the common clinical method applied for determination of α_1 -antitrypsin in human serum.

2. Specific cell labeling of human red blood cells.

Fresh human red blood cells (HRBC) were shaken for 50 min at 4°C with rabbit anti-HRBC (10⁶ HRBC with 0.8 μg rabbit anti-HRBC) antibodies. The sensitized cells were separated and washed 4 times by centrifugation with PBS. The washed sensitized cells were then shaken at 4°C for 1 h with Gα RIgG magnetic conjugated microspheres (5 mg) prepared as described in example 26. The labeled cells were then separated from excess microspheres by 3 centrifugations with PBS. Control experiments carried out similarly, substituting the sensitized rabbit anti-HRBC with non-sensitized HRBC. Examination with light microscopy demonstrated the specific labeling of the RBC by the GαRIgG conjugated microspheres. The control cells, on the other hand, were not labeled at all.

3. Separation of turkey RBC from human RBC.

A mixture containing 10⁶ human RBC and 10⁶ turkey RBC was treated with magnetic microspheres by using the labeling procedure described in (2). A small magnet was then fitted on the outside wall of a vial containing 5 ml PBS

suspension of the mixture of cells. After ca. 5 min, cells that were not attracted to the wall were isolated. The attracted cells were resuspended in PBS and the magnetic separation repeated twice. Examination in light microscopy demonstrated separation efficiency of 98%-100% of the human RBC from the turkey RBC.

4. Specific labeling of mouse splenocytes bearing surface immunoglobulins (B cells).

G∝MIg conjugated microspheres (5 mg) prepared as described in example 26 were shaken at 4°C for 1 h with purified mouse splenocytes (106). The labeled cells were then separated from excess microspheres by 3 centrifugation cycles with PBS. Control experiments carried out similarly, substituting the mouse splenocytes with mouse thymocytes. Examination with light microscopy demonstrated the specific labeling of the mouse splenocytes with the G∝MIg conjugated microspheres. The control cells, on the other hand, were not labeled at all.

All the above description and examples have been provided for the purpose of illsutartion, and are not intended to limit the invention in any way. Many modifications can be carried out in the process of the invention. For instance, different polymeric materials, coatings, solutions, initiators and conjugates can be used, to produce various full or hollow microspheres. Furthermore the microspheres of the invention can be used in a variety of applications, medical, diagnostics and others, all without exceeding the scape of the invention.

-33-

CLAIMS:

- 1. A process for the preparation of a microsphere comprising a coating composed of one or more silica nanoparticles layers, comprising the steps of:
- a) providing a microsphere of polymeric material, the said microsphere having adsorbed on its surface one or more surfactants; and
- b) causing a layer of silica nanoparticles to coat the surface of the said microsphere by means of seeded polymerization of alkyl silicates onto the surface of said microsphere.
- 2. A process according to claim 1, further comprising the step of coating the surface of the microsphere with one or more additional layers of different material, before creating the silica coating.
- 3. A process according to claim 2, wherein the additional layer comprises magnetic materials.
- 4. A process according to claim 3, wherein the magnetic material is Fe_3O_4 .
- 5. A process according to claim 4, wherein the polymeric material is of hydrophobic type and is chosen from among polystyrene, polychloromethylstyrene and polymethylmethacrylate.
- 6. A process according to claim 5, wherein said alkyl silicate is Si(OFt)

-34-

- 7. A process according to claim 1, wherein the microspheres are prepared by in situ polymerization.
- 8. A process according to claim 7, wherein the polymerization is carried out in the presence of a polymerization initiator.
- 9. A process according to claim 7, wherein the initiator is benzoylperoxide.
- 10. A process according to claim 5, wherein the surfactant has a hydrophylic nature.
- 11. A process according to claim 10, wherein the hydrophylic surfactant is chosen from among polyvinylpyrrolone, polyacrylic acid and polyethyleneoxide.
- 12. A process according to claim 6, further comprising removing the inner polymeric material to produce a hollow shell.
- 13. A process according to claim 12, wherein the removal of the inner polymeric materials is accomplished by burning off or by dissolving off said polymeric material.

11 1 10 5 44

- 15. A process according to claim 14, wherein the ligands form covalent bonds with the silica layer.
- 16. A process according to claim 14, wherein the functional group is an amine group or other group which can be converted to amine group.
- 17. A process according to claim 15, wherein the ligands are chosen from among $SiCl_3(CH_2)_nX$, $Si(OR)_3(CH_2)_nX$, $OH(CH_2)_nX$, wherein R is an alkyl substituent, n is between 2 to 20 and X is $-NH_2$, $-CH_3$, $-CO_2R$, -CN.
- 18. A process according to claim 17, further comprising binding polyaldehyde ligands to the amino groups, on the coated microsphere surface.
- 19. A process according to claim 18, wherein residual amino groups on the surface of the said microsphere are blocked by suitable reagents.
- 20. A process according to claim 19, wherein the reagent is acetic acid N-hydroxysuccin-imide ester.
- 21. A process according to claim 13, wherein the temperature applied to when burn off the organic core of the microspheres is between 400°C and 900°C.
- 22. A process according to claim 13, wherein the inner organic core of the microsphere is dissolved by

WO 96/11054 PCT/US95/12988

-36-

- 23. A process according to claim 4, wherein the magnetic coating of Fe₃O₄ is obtained by introducing the microspheres and Fe⁺² ions into an aqueous solution, in the presence of oxidizing agents.
- 24. A process according to claim 23, wherein the temperature is between 55° C-90°C.
- 25. A process according to claim 23, wherein the pH of the solution is between about 8 and 11, preferably between 10 and 11.
- 26. A process according to claim 23, wherein the oxidizing agent is chosen from among $NaNo_2$, H_2O_2 and air.
- 27. A process according to claim 19, further comprising coupling amino ligands to the derivatized aldehyde microspheres.
 - 28. A polymeric microsphere, having a diameter


WO 96/11054 PCT/US95/12988

-37-

- 31. A microsphere according to claim 29, comprising one or more magnetic layers coupled to the surfactants, coated with a silica coating.
- 32. A hollow microsphere consisting of one or more shells of magnetic material and one or more silica shells.
- 33. A solid or hollow microsphere according to claim 32, further comprising ligands with desired functional groups bound to the microsphere silica layer.
- 34. A microsphere according to claim 33, wherein the ligands comprise amine functional group or groups which may be converted to amine.
- 35. A microsphere according to claim 34, wherein the convertible group is a ciano, -CN.
- 36. A microsphere according to claim 33, wherein the ligands are chosen from among $SiCl_3(CH_2)_nX$, $Si(OR)_3(CH_2)_nX$, $OH(CH_2)_nX$, wherein R is an alkyl substituent, n is between 2 to 20 and X is selected from $-NH_2$, $-CH_3$, $-CO_2R$, and -CN.
- 37. A microsphere according to claim 36, comprising polyaldehyde ligands attached to said microspheres.

WO 96/11054 PCT/US95/12988

- 38. A microsphere according to claim 36, comprising polyaldehyde ligands covalently attached to the amine groups on the coated microsphere surface.
- 39. A microsphere according to claim 38, wherein said polyaldehyde compounds are chosen from among glutaraldehyde and polyacrolein.
- 40. A microsphere according to claim 39, comprising amino ligands conjugated to said polyaldehyde.
- 41. A microsphere according to claim 40, wherein the amino ligands are chosen from among proteins, enzymes and antibodies.
- 42. Use of hollow or solid magnetic or nonmagnetic silica coated microsphere, for biological or medical applications.
- 43. Use of a microsphere according to claim 42, wherein said biological applications include cell labeling, cell separation and diagnostics.

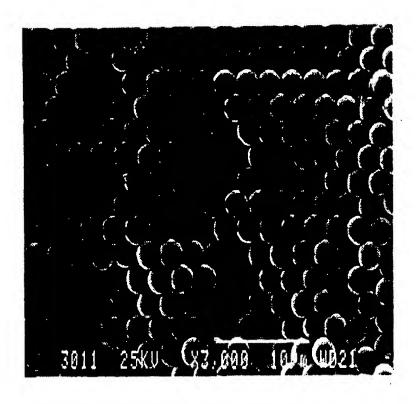

WO 96/11054 PCT/US95/12988 2/6 .25,000

FIGURE 2

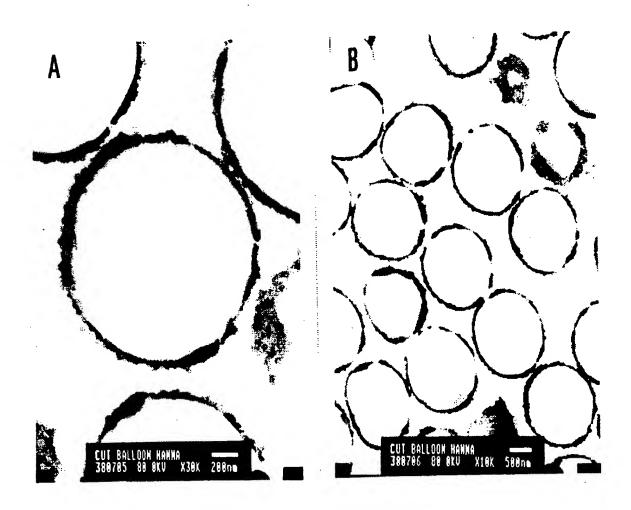
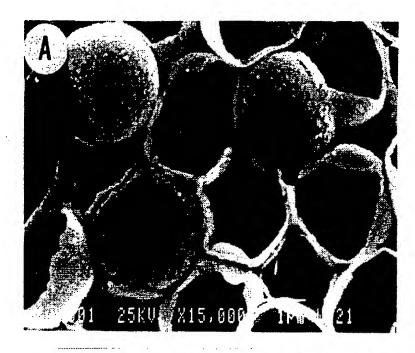
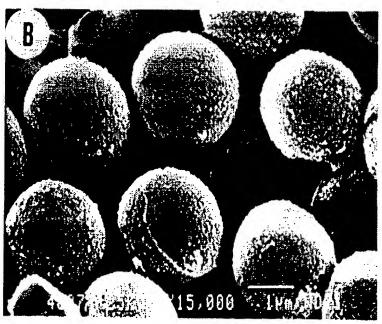


FIGURE 3






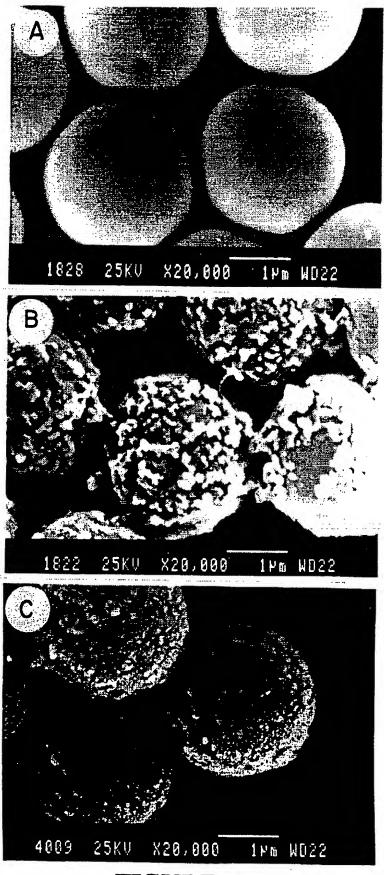


FIGURE 5





WORLD INTELLECTUAL PROPERTY ORGANIZATION International Bureau

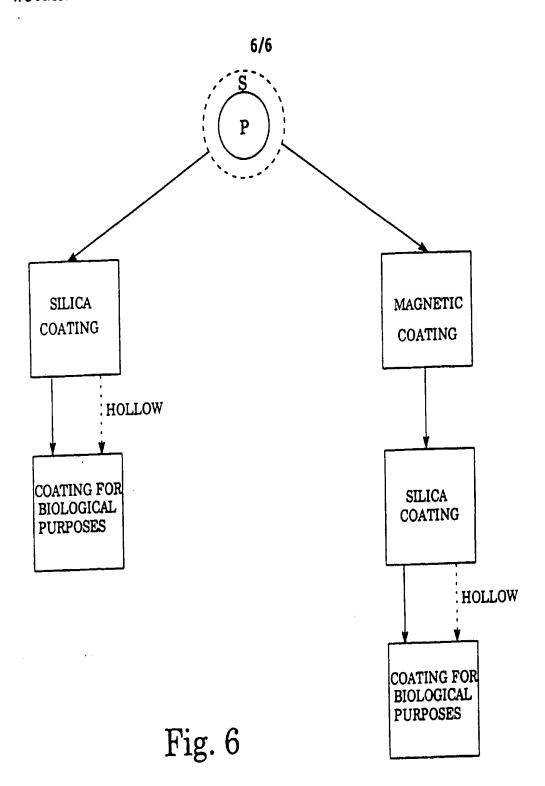

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶:
B01J 13/04, A61K 47/48, 49/00, 9/50

(11) International Publication Number:

WO 96/11054

(43) International Publication Date:

18 April 1996 (18.04.96)

(21) International Application Number:

PCT/US95/12988

A3

(22) International Filing Date:

5 October 1995 (05.10.95)

(30) Priority Data:

111186

6 October 1994 (06.10.94)

IL

(71) Applicants (for all designated States except US): BAR-ILAN UNIVERSITY [IL/IL]; 52900 Ramat-Gan (IL). LICHTEN-STEIN, Joseph [US/IL]; 17 HaAdmor MiGur Street, 51525 Bnei-Brak (IL).

(72) Inventors; and

- (75) Inventors/Applicants (for US only): MARGEL, Shlomo [IL/IL]; 14 Habaal-Shem-Tov Street, 76210 Rehovot (IL). BAMNOLKER, Hanna [IL/IL]; 122 Catsanelson Street, 53279 Givataim (IL).
- (74) Agent: KURUCZ, John; 20th floor, 711 3rd Avenue, New York, NY 10017 (US).

(81) Designated States: AL, AM, AT, AU, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TT, UA, UG, US, UZ, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG), ARIPO patent (KE, MW, SD, SZ, UG).

Published

With international search report.


Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.

(88) Date of publication of the international search report: 23 May 1996 (23.05.96)

(54) Title: PROCESS FOR THE PREPARATION OF MICROSPHERES AND MICROSPHERES MADE THEREBY

(57) Abstract

A process for the preparation of a microsphere comprising a coating composed of one or more silica nanoparticles layers, comprises the steps of: a) providing a microsphere of polymeric material, the said microsphere having adsorbed on its surface one or more surfactants; and b) causing a layer of silica nanoparticles to coat the surface of the said microsphere by means of seeded polymerization of alkyl silicates onto the surface of said microsphere.

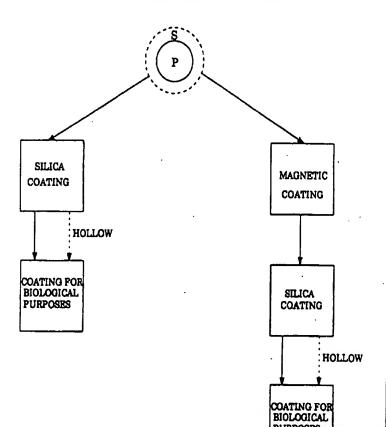

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria `	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
.BR	Brazil	JP	Japan	PT	Portugal
BY	. Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgystan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic	SD	Sudan
CG	Congo		of Korea	SE	Sweden
CH	Switzerland	KR	Republic of Korea	SI	Slovenia
. CI	Côte d'Ivoire	KZ.	Kazakhstan	SK	Slovakia
CM	Cameroon	u	Liechtenstein	SN	Senegal

INTERNATIONAL SEARCH REPORT

Inter nal Application No PCT/US 95/12988

A. CLASS IPC 6	IFICATI N OF SUBJECT MATTER B01J13/04 A61K49/00 A61K47/4	38 A61K9/50
According t	to International Patent Classification (IPC) or to both national classi	fication and IPC
B. FIELDS	SEARCHED	
Minimum d IPC 6	ocumentation searched (classification system followed by classificat B01J A61K	nan symbols)
Documenta	non searched other than minimum documentation to the extent that	such documents are included in the fields searched
Electronic d	late base consulted during the international search (name of data base).	se and, where practical, search terms used)
C. DOCUM	IENTS CONSIDERED TO BE RELEVANT	
Category *	Citation of document, with indication, where appropriate, of the re	elevant passages Relevant to claim No.
A	J. OF COLLOID AND INTERFACE SCIENT vol. 138, no. 2, September 1990 pages 53434-542, XP 000561465 KAWAHASHI ET AL. 'Preparation and Properties of Uniform Coated Colloid Particles' cited in the application J. OF COLLOID AND INTERFACE SCIENT vol. 143, no. 1, April 1991 pages 103-110, XP 000561464 KAWAHASHI ET AL. 'Preparation of Spherical Particles of Yttrium Colloid Research vol. 143 pages 103-110, XP 000561464 KAWAHASHI ET AL. 'Preparation of Spherical Particles of Yttrium Colloid Research vol. 143 pages 103-110, XP 000561464 KAWAHASHI ET AL. 'Preparation of Spherical Particles of Yttrium Colloid Research vol. 143 pages 143-140 pages 143-	nd loidal NCE,
	cited in the application	·/
X Furt	her documents are listed in the continuation of box C.	X Patent family members are listed in annex.
'A' docume conside 'E' earlier filing o 'L' docume which citation 'O' docume other r 'P' docume later th	ent which may throw doubts on priority claim(s) or is cited to establish the publication date of another in or other special reason (as specified) ent referring to an oral disclosure, use, exhibition or means ent published prior to the international filing date but han the priority date claimed	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered nowed or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. "A:" document member of the same patent family
	actual completion of the international search D March 1996	Date of mailing of the international search report 0 1 -04- 1996
Name and n	nailing address of the ISA	Authorized officer

1

European Patent Office, P.B. 5818 Patentiaan 2 NL - 2280 HV Rijswijk



Interr tial Application No PCT/US 95/12988

CIC	DOCUMENTS CONCIDENCE TO BE DELEVISION	PCT/US 95	0/12988
Category *	Libon) DOCUMENTS CONSIDERED TO BE RELEVANT Citation of document, with indication, where appropriate, of the relevant passages		Relevant to claim No.
A	LANGMUIR, vol. 10, no. 1, January 1994 pages 8-16, XP 0000561075 MATIJEVIC 'Uniform Inorganic Colloid Dispersions. Achievements and Challenges' cited in the application		
4	WO,A,92 16838 (GEC-MARCONI) 1 October 1992 see claims	:	
,	EP,A,O 321 322 (RHONE-POULENC CHEMIE) 21 June 1989		
\	EP,A,0 573 150 (TIOXIDE GROUP SERVICES) 8 December 1993		
١	FR,A,2 564 336 (OHAYON) 22 November 1985		
;		7	
	·		
	•		
			-

1

INTERNATIONAL SEARCH REPORT

Intern nal Application No PCT/US 95/12988

Patent document cited in search report	Publication date 01-10-92	Patent family member(s)		Publication date	
WO-A-9216838		EP-A- GB-A,B JP-T-	0640216 2255637 6506058	01-03-95 11-11-92 07-07-94	
EP-A-321322	21-06-89	FR-A- AU-B- DE-A- JP-A- JP-B- US-A- US-A-	2624873 2693888 3866341 1259064 7062109 4985166 5108636	23-06-89 22-06-89 02-01-92 16-10-89 05-07-95 15-01-91 28-04-92	
EP-A-573150	08-12-93	AU-8- CA-A- GB-A- JP-A- NO-A- NZ-A- ZA-A-	661773 2092239 2267503 6100701 931987 247762 9303347	03-08-95 05-12-93 08-12-93 12-04-94 06-12-93 27-06-95 17-11-93	
FR-A-2564336	22-11-85	NONE			